



M316D

Wheel Excavator



CAT[®]

Cat[®] C6.6 engine with ACERT[™] Technology

Net power (ISO 9249) at 1800 rpm	118 kW/160 hp
Operating weight	17 600 to 19 800 kg
Bucket capacities	0.38 to 1.26 m³
Maximum reach at ground level	9380 mm
Maximum digging depth	6070 mm
Maximum travel speed	37 km/h

M316D Wheel Excavator

The D Series incorporates innovations for improved performance and versatility.

Engine

- ✓ Caterpillar's exclusive ACERT™ Technology surpasses the most stringent emissions requirements in the construction industry. The EU Stage IIIA compliant C6.6 offers increased performance and reliability while reducing fuel consumption and sound levels. **pg. 4**

Hydraulics

- ✓ The state of the art load-sensing hydraulic system combined with a separate dedicated swing pump provides fast cycle times, increased lift capacity and high bucket and stick forces. This combination maximizes your productivity in any job. **pg. 5**

Operator Comfort

- ✓ The totally redesigned operator station maximizes comfort while increasing safety. The available auto-weight adjusted air-suspension seat with heated and cooled ventilated cushions improves operator comfort. Safety is enhanced by the new color monitor and optional rear-mounted camera. **pg. 6**

Environmentally Responsible Design

- ✓ Helping to protect our environment, the engine has low operator and spectator sound levels, longer filter change intervals and is more fuel-efficient. **pg. 4**

SmartBoom™

- ✓ More productive. Faster cycle times for truck loading and rock scraping. Maintains optimum hammering frequency for effective, steady productivity. **pg. 5**

Increased lifting capacity, improved cycle times and ease of operation lead to increased productivity and lower operating costs.

✓ *New Feature*



Undercarriage

Various undercarriage configurations are available to provide the best solution for your work environment; these configurations can include a dozer blade and/or outriggers depending on your needs. **pg. 8**

Booms and Sticks

Caterpillar® excavator booms and sticks are built for performance and long service life. The box section design provides the strength needed for even the toughest applications. Multiple boom and stick options allow you to pick the best match for your job. **pg. 8**

Work Tools

The combination of Caterpillar machines and work tools provide a total solution for any application. A variety of couplers, buckets, hammers, grapples, shears, multi-processors to name a few are offered to optimize your machine's versatility. **pg. 9**

Versatility

Caterpillar offers a wide variety of factory-installed attachments that enhance performance and job site management. **pg. 12**

Serviceability

For increased safety, all daily maintenance points are accessible from ground level. A centralized greasing system allows lubrication of critical points. **pg. 10**

Complete Customer Service

Your Cat® dealer offers a wide range of services that can be set up under a customer support agreement when you purchase your equipment. Your dealer will help you choose a plan that can cover everything from machine and attachment selection to replacement. **pg. 10**



Engine

Built for power, reliability, low maintenance, excellent fuel economy and low emissions.



Powerful Performance. The Cat C6.6 engine with ACERT Technology introduces a series of evolutionary, incremental improvements that provide breakthrough engine performance. The building blocks of ACERT Technology are fuel delivery, air management and electronic control. ACERT Technology optimizes engine performance while meeting EU Stage IIIA engine emission regulations. The Cat C6.6 engine in the M316D delivers a maximum gross power of 124 kW at a rated speed of 1800 rpm. This is 20% more horsepower as compared to the 3056E in the M316C.

Low Fuel Consumption. The C6.6 is electronically controlled and uses the new Cat Common Rail Fuel System and fuel pump. This combination provides outstanding fuel consumption during both production and travel. When the system recognizes roading application the engine will operate at the most efficient system operating point to save fuel without compromising road performance.

Low Noise, Low Vibration. The Cat C6.6 design improves operator comfort by reducing sound and vibration.

Cooling System. An electronically controlled, hydraulic motor drives a variable speed on-demand fan for engine coolant and hydraulic oil. The optimum fan speed is determined based on coolant and hydraulic oil temperature resulting in reduced fuel consumption and lower sound levels. The electronic engine control continuously compensates for the varying fan load, providing consistent net power, regardless of operating conditions.

One-Touch Low Idle Control.

The two stage, one-touch Automatic Engine Speed Control reduces engine speed if no operation is performed, maximizing fuel efficiency and reducing sound levels.

Waste Handling Package.

The Waste Handling Package has been specifically developed for Cat Wheel Excavators working in waste transfer stations or other extremely dusty applications. This option features the following:

- An automatic, hydraulic reversible fan that reverses airflow after a set interval, manually adjustable between 5 and 60 minutes with a switch located inside the cab.
- A special dense wire mesh cooling system hood further reduces radiator clogging.
- Two cyclone filters provide clean filtered air to the engine compartment, air cleaner, aftercooler and air conditioner condenser.

Environmentally Responsible Design

The M316D helps build a better world and preserve the fragile environment.

Fuel Efficiency. The D-Series Wheel Excavators are designed for outstanding performance with high fuel efficiency. This means more work done in a day, less fuel consumed and minimal impact on our environment.

Low Exhaust Emissions. The EU Stage IIIA compliant Cat C6.6 offers increased performance and reliability while reducing fuel consumption and sound levels.

Quiet Operation. Operator and spectator noise levels are extremely low as a result of the new variable speed fan and remote cooling system.

Biodegradable Hydraulic Oil.

The optional biodegradable hydraulic oil (HEES™) is formulated to provide excellent high-pressure and high temperature characteristics, and is fully compatible with all hydraulic components. HEES is fully decomposed by soil or water microorganisms, providing a more environmentally sound alternative to mineral-based oils.

Fewer Leaks and Spills. Lubricant fillers and drains are designed to minimize spills. Cat O-Ring Face Seals, Cat XT™ Hose and hydraulic cylinders are all designed to help prevent fluid leaks that can reduce the machine performance and cause harm to the environment.

Longer Service Intervals. Working closely with your Caterpillar Dealer can help extend service intervals for engine oil, hydraulic oil, axle oil and coolant. Meaning fewer required fluids and fewer disposals, all adding up to lower operating costs.

Hydraulics

Load-sensing hydraulic system provides fast cycle times, increased lift capacity and high bucket and stick forces to maximize your productivity in any job.

Dedicated Swing Pump. A dedicated variable displacement piston pump and fixed displacement piston motor power the swing mechanism. This closed hydraulic circuit maximizes swing performance without reducing power to the other hydraulic functions, resulting in smoother combined movements.

Heavy Lift Mode. This mode maximizes lifting performance by boosting the lifting capability of the excavator by 7%. Heavy loads can be easily moved in the full working range of the machine, maintaining excellent stability.

Adjustable Hydraulic Sensitivity. This function allows the operator to adjust the aggressiveness of the machine according to the application. For precision work, one of four different levels of aggressiveness can be preselected.

Proportional Auxiliary Hydraulics. Versatility of the hydraulic system can be expanded to utilize a wide variety of hydraulic work tools using multiple valve options.

- The Multi-Combined Valve is the core of the Tool Control System, allowing the operator to select up to ten pre-programmed work tools from the monitor. These preset hydraulic parameters support either one-way or two-way flow. The joystick sliding switches allow modulated control of the work tool.



- A dedicated Hammer circuit is the best option for tools that require one-way flow only, and do not require the flexibility provided by the Multi-Combined Valve.
- The Medium Pressure Function Valve provides proportional flow that is ideal for tilting buckets or rotating tools.
- A new feature for the D-Series Wheel Excavators is the optional second High Pressure valve. In combination with the Multi-Combined Valve, it provides the possibility to operate the machine with work tools or in applications requiring a third auxiliary hydraulic function, such as a tilting/rotating quick coupler.

Stick Regeneration Circuit. The stick regeneration circuit increases efficiency and helps increase controllability for higher productivity and lower operating costs.

Quick Coupler. The machine can be optionally equipped with a dedicated hydraulic circuit to operate hydraulic quick couplers.

Hydraulic Snubbers. Caterpillar integrates its cylinder snubber technology into all Wheel Excavator boom, stick and bucket cylinders. These snubbers help cushion shocks, reduce sound and increase cylinder life.

Caterpillar XT-6 ES Hoses. Premium quality rubber, precision 4-ply wire reinforcement and exclusive reusable couplings are all unique features that deliver top performance and long life.

SmartBoom. Reduces stress and vibrations transmitted to the machine and provides a more comfortable environment.



Rock Scraping. Scraping rock and finishing work is easy and fast. SmartBoom simplifies the task and allows the operator to concentrate on stick and bucket, while boom freely goes up and down without using pump flow.



Hammer Work. The front parts automatically follow the hammer while penetrating the rock. Blank shots or excessive force on the hammer are avoided resulting in longer life for the hammer and the machine. Similar advantages with vibratory plate compactors.



Truck Loading. Loading trucks from a bench is more productive and fuel efficient as the return cycle is reduced while the boom down function does not require pump flow.

Operator Comfort

The interior layout maximizes operator space, provides exceptional comfort and reduces operator fatigue.



Interior Operator Station. Improved visibility and ergonomics are some of the many new features of the D-Series Wheel Excavators. The pressurized operator station provides maximum space and is designed for simplicity and functionality. Frequently used switches are centralized and are situated on the right-hand switch console. The left-hand seat console controls dozer blade and/or outriggers, and is tiltable for easy access to the cab. The fully automatic climate control adjusts temperature and air flow for exceptional operator comfort. Other comfort features include a cigar lighter, ashtray, cup/can holder, magazine rack and integrated mobile phone holder.

Cab Construction. The exterior design uses thick steel tubing along the bottom perimeter of the cab, improving the resistance to fatigue and vibration. This design allows the falling object guards to be bolted directly to the cab. The cab shell is attached to the frame with rubber mounts that limit vibration and sound transmitted from the frame, substantially reducing interior noise levels.



Viewing Area. To maximize visibility, all glass is affixed directly to the cab, eliminating the use of window frames. Choice of fixed or easy-to-open split front windshield meet operator preference and application conditions.

- The 50/50 split front windshield allows both upper and lower portions to be stored in an overhead position and features the one-touch action release system.
- The 70/30 split front windshield stores the upper portion above the operator. The lower front windshield features a rounded design to maximize downward visibility and improves wiper coverage. Also features the one-touch action release system.
- The fixed front windshield comes with high impact resistant laminated glass.
- A unique large skylight without cross bar provides superb upward visibility. The retractable sunscreen blocks direct sunlight.



Monitor. The new compact color monitor displays information in local language that is easy to read and understanding.

Functions include:

- 5 programmable “Quick Access” buttons for one-touch selection of favorite functions.
- Filter and oil change warnings are displayed when the number of hours reaches the maintenance interval.
- Tool select function allows the operator to select up to 10 pre-defined hydraulic work tools.
- Adjustable braking characteristics enable the operator to select three levels of travel motor retarder aggressiveness when releasing the travel pedal.
- Provides a rear camera view that is activated through the monitor menu. The optional camera is mounted on the counterweight.



New Deluxe Seat. The new optional deluxe seat, equipped with an active seat climate system, improves operator comfort. Cooled air flows through the seat cushions to reduce body perspiration. On cold days, a two-step seat heater keeps the operator warm and comfortable. The fully adjustable seat with adjustable lumbar support automatically adjusts to the driver's weight providing a more relaxed and comfortable environment.

Heated Mirrors. Another new feature is electrically heated mirrors, increasing safety and visibility in cold conditions.

Wipers. The parallel wiper system maximizes visibility in poor weather conditions. The wiper virtually covers the entire front windshield, cleaning the operator's immediate line of sight.



Lunch Box. A large, cooled storage compartment is located behind the operator's seat. The compartment provides sufficient room to store items such as a lunch box. An optional cover secures the contents during machine operation.

Foot Pedals. Two-way pedals for travel and auxiliary circuits provide increased floor space, reducing the need to change positions. The foot pedal for auxiliary high-pressure circuit can be locked in the off position and used as a footrest for greater operator comfort.

Undercarriage

Undercarriage and axle design provides maximum strength, flexibility and mobility on wheels.



Increased Travel Speed. The maximum travel speed for the D-Series excavators has been increased from 34 to 37 km/h, reducing travel time between sites and increasing productivity.

Heavy-Duty Axles and Stabilizers.

The D-Series undercarriage with pin on/bolt on design provides excellent flexibility, rigidity and long life. Effective hydraulic line routing, transmission protection and heavy-duty axles make the undercarriage perfect for wheel excavator applications. The front axle offers wide oscillating and steering angles. The transmission is mounted directly on the rear axle for protection and optimum ground clearance.

Advanced Disc Brake System.

The disc brake system acts directly on the hub instead of the drive shaft to avoid planetary gear backlash. This solution eliminates the rocking effect associated with working free on wheels. The axle design lowers maintenance and lifetime costs. Oil change intervals are at 2000 working hours, further reducing owning and operating costs.

Fenders. The optional fenders provide excellent coverage of the front and rear tires, protecting the machine from mud and dirt. Water cannot splash up on the windscreen or cooler. The fenders further protect the machine from stones and debris being thrown up by the tires, providing additional safety for the machine, other vehicles and personnel working close to the excavator.

Adjustable Travel Alarm. An adjustable travel alarm is available to warn people when the machine is moving. Three settings can be selected through the monitor:

- Auto mode – alarm will stop sounding immediately when the machine is no longer traveling, or has been sounding for an uninterrupted 10-second interval.
- Standard mode – alarm operates constantly during moving, with only manual cancellation.
- Off mode – travel alarm is disabled.

Booms and Sticks

Designed for maximum flexibility to keep production high on all jobs.



Design. Booms and sticks are welded, box section structures with thick, multiplate fabrications in high stress areas, for rugged performance and long service life.

Flexibility. The choice of three booms and four sticks provides the right balance of reach and digging forces for all applications.



Variable Adjustable (VA) Boom. The VA boom offers improved right side visibility and machine roading balance. When working in tight quarters or lifting heavy loads, the VA boom offers the best flexibility.

One-Piece Boom. The one-piece boom fits best for all standard applications such as truck loading and digging. A unique straight section in the curve of the side plate reduces stress flow and helps increase boom life.


Offset Boom. The large offset dimensions (left/right 2460/2760 mm) allow you to dig along walls, over obstacles, to grade while driving, and to dig under laid tubes without damaging them. The combination with a tiltable ditch cleaning bucket lets you operate a highly versatile system.

Sticks. Four different stick lengths are offered to match different application requirements:

- Short stick (2100 mm) for maximum breakout force and lifting capability.
- Medium stick (2400 mm) for greater crowd force and lift capacity.
- Long stick (2600 mm) for greater depth and reach requirements.
- Industrial stick (3100 mm) for use with free-swinging grapples in material handling and industrial applications.

Work Tools

A wide variety of Work Tools help optimize machine performance. Purpose designed and built to Caterpillar's high durability standards.

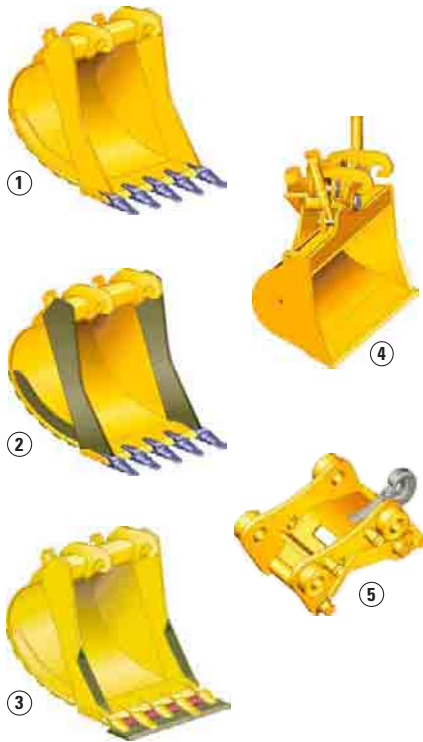

Work Tools. Caterpillar work tools are designed to function as an integral part of your excavator and to provide the best possible performance in your particular application. All work tools are performance-matched to Cat machines.

Quick Couplers. Quick Couplers enable the operator to simply release one work tool and connect to another, making your hydraulic excavator highly versatile. Productivity also increases, as a carrier no longer needs to be idle between jobs. Caterpillar offers hydraulic and spindle quick coupler versions.

Buckets. Caterpillar offers a wide range of specialized buckets, each designed and tested to function as an integral part of your excavator. Buckets feature the new Caterpillar K Series™ Ground Engaging Tools.

- 1 Excavation (X)
- 2 Extreme Excavation (EX)
- 3 Excavation Leveling
- 4 Ditch Cleaning
- 5 Quick Coupler

Hammers. Cat hammer series deliver very high blow rates, increasing the productivity of your tool carriers in demolition and construction applications. Wide oil flow acceptance ranges make the Caterpillar hammers suitable for a wide range of carriers and provide a system solution from one safe source.

Orange Peel Grapples. The Orange Peel Grapple is constructed of high-strength, wear-resistant steel, with a low and compact design that makes it ideal for dump clearance. There are several choices of tine and shell versions.

Multi-Grapples. The Multi-Grapple with unlimited left and right rotation is the ideal tool for stripping, sorting, handling and loading. The powerful closing force of the grab shells combined with fast opening/closing time ensures rapid cycle time which translates to more tons per hour.

Multi-Processors. Thanks to its single basic housing design, the Multi-Processor series of hydraulic demolition equipment makes it possible to use a range of jaw sets that can handle any demolition job. The Multi-Processor is the most versatile demolition tool on the market.

Vibratory Plate Compactors. Cat compactors are performance-matched to Cat machines, and integrate perfectly with the Cat hammer line – brackets and hydraulic kits are fully interchangeable between hammers and compactors.

Shears. Cat shears provide superior and effective scrap processing, and are highly productive in demolition environments. Shears are compatible with a matching Cat excavator, and bolt-on brackets are available for either stick or boom-mounted options.

Serviceability and Complete Customer Support

Simplified and easy maintenance save you time and money.

Cat dealer services help you operating longer with lower costs.



Ground Level Maintenance. Caterpillar designed its D-Series Wheel Excavators with the operator and service technician in mind. Gull-wing doors, with pneumatically-assisted lift cylinders, effortlessly lift up to allow critical maintenance to be performed quickly and efficiently while maintaining operator safety.

Extended Service Intervals. The D Series Wheel Excavator service and maintenance intervals have been extended to reduce machine service time, increase machine availability and reduce operating costs. Using S•O•S Scheduled Oil Sampling analysis, hydraulic oil change intervals can be extended up to 4000 hours. Engine coolant change intervals are 12 000 hours with Cat Extended Life Coolant.

Engine Oil. Caterpillar engine oil is formulated to optimize engine life and performance. The specially formulated oil is more cost effective and increases engine oil change interval to 500 hours, providing industry leading performance and savings.

Self-Monitoring System with Auto-Diagnostics. The electronic engine and machine controllers provide detailed diagnostic capability for the service technicians. The ability to store active and intermittent indicators simplifies problem diagnosis and reduces total repair time, resulting in improved machine availability and lower operating cost.

Air Filters. Caterpillar air filters eliminate the use of service tools, reducing maintenance time. The air filter features a double-element construction with wall flow filtration in the main element and built-in mini-cyclone precleaners for superior cleaning efficiency. The air filters are constantly monitored for optimum performance. If airflow becomes restricted, a warning is displayed by the way of the in-cab monitor.

Capsule Filter. The hydraulic return filter, a capsule filter, prevents contaminants from entering the system when the hydraulic oil is changed.

Fuel Filters. Cat high efficiency fuel filters with a Stay-Clean Valve™ features a special media that removes more than 98% of particles, increasing fuel injector life. Both the primary and secondary fuel filters are located in the engine compartment and can be easily changed from ground level.

Water Separator. The D Series is equipped with a primary fuel filter with water separator located in the engine compartment. For ease of service, the water separator can be easily accessed from ground level.

Fuel Tank Drain. The durable, corrosion-free tank has a remote drain located at the bottom of the upper frame to remove water and sediment. The tank drain with hose connection allows simple, spill-free fluid draining.

Front Compartment. The front compartment hood can be opened vertically, providing outstanding ground level access to the batteries, air-to-air after cooler, air conditioner condenser and the air cleaner filter.

Swing-out Air Conditioner Condenser. The Air Conditioning condenser swings out horizontally to allow complete cleaning on both sides as well as excellent access to the air-to-air aftercooler.

Scheduled Oil Sampling. Caterpillar has specially developed S•O•S Oil Sampling Analysis to help ensure better performance, longer life and increased customer satisfaction. This thorough and reliable early warning system detects traces of metals, dirt and other contaminants in your engine, axle and hydraulic oil. It can predict potential trouble avoiding costly failures. Your Caterpillar dealer can give you results and specific recommendations shortly after receiving your sample.

Engine Inspection. The engine can be accessed from both ground level and the upper structure. The longitudinal layout ensures that all daily inspection items can be accessed from ground level.

Anti-Skid Plates. They cover the top of the steps and upper structure to help prevent slipping during maintenance. The Anti-Skid plates reduce the accumulation of mud on the upper structure, improving the cleanliness and safety.



Easy to Clean Coolers. Flat fins on all coolers reduce clogging, making it easier to remove debris. The main cooling fan and air conditioner condenser are both hinged for easier cleaning.

Remote Greasing Blocks. For those hard to reach locations, greasing blocks have been provided to reduce maintenance time. One block is located in the engine compartment with two grease points for the swing bearing and front-end attachment. For the undercarriage, two remote blocks provide easy access for greasing the oscillating axle and, as an option, the dozer blade.

New LED Rear Lights. Optional Light Emitting Diode (LED) rear lights replace the standard lights, for increased visibility on the job site, higher durability and longer life.



New Auto-Lube System. The new automatic lubrication system provides the optimal amount of grease to all the main lubrication points, including the bucket linkage. The lubrication interval can be adjusted through the monitor, and status messages for the auto-lube system are displayed.

Handrails and Steps. Large handrails and steps assist the operator in climbing on and off the machine.

Storage Box. There are two tool boxes integrated in the steps of the undercarriage. Additionally, there is a waterproof storage box integrated into the upper structure steps.

Product Support. You will find nearly all parts requirements at your local Caterpillar dealer parts counter. Cat dealers utilize a world-wide network to find in-stock parts to minimize your downtime. To save money use genuine Cat Reman parts. You will receive the same warranty and reliability as new products at a substantial cost savings.

Selection. Make detailed comparisons of the machines you are considering before you buy. How long do components last? What is the cost of preventive



maintenance? Your Cat dealer can give you precise answers to these questions to make sure you operate your machines at the lowest cost.

Purchase. Consider the financing options available as well as day-to-day operating costs. This is also the time to look at dealer services that can be included in the cost of the machine to yield lower equipment and owning and operating costs over the long run.

Operation. Improving operating techniques can boost your profits. Your Cat dealer has videotapes, literature and other ideas to help you increase productivity, and Caterpillar offers certified operator training classes to help maximize the return on your machine investment.

Maintenance. More and more equipment buyers are planning for effective maintenance before buying equipment. Choose from your dealer's wide range of maintenance services at the time you purchase your machine. Repair option programs guarantee the cost of repairs up front. Diagnostic programs such as S•O•S Fluid Analysis and Technical Analysis help you avoid unscheduled repairs.

Replacement. Repair, rebuild or replace? Your Cat dealer can help you evaluate the cost involved so you can make the right choice.

Versatility

A wide variety of optional factory-installed attachments are available to enhance performance and improve job site management.



Tool Control. The integrated Tool Control system allows the operator to select up to 10 pre-set combinations. This eliminates the need to re-set the hydraulic parameters each time a tool is changed. Individual flow and pressure can be programmed easily as well as one-way/two-way hydraulic functions. Each of the ten-programmed tools can even be given a specific name. The unique Cat proportional sliding switches and optional auxiliary pedal provide modulation to the tool to make precision work easy.

Joystick Steering. The unique joystick steering option enables an operator to reposition the machine while traveling in first gear by the use of the slider switch on the right joystick. This enables the operator to keep both hands on the joysticks while simultaneously moving the implements and traveling. The operator can do more precise work faster with increased safety around the machine.

Control Settings. There are 2 selectable control settings and one automatic travel setting. The new automatic travel mode is activated with a button in the right hand console. In this setting, the transmission will automatically shift up or down, depending on the speed conditions. The operator can choose the best power setting for both engine and hydraulic power versus fuel efficiency.

- Economy Mode – used for lifting, pipe setting, grading, slope finishing and precise work while reducing fuel consumption.
- Power Mode – used for normal truck loading and digging applications, trenching or hammer use.
- Travel Mode – automatically set when the travel pedal is actuated. It provides maximum speed and drawbar pull.

Product Link. Product Link can assist with Fleet Management to keep track of hours, location, security and product health. The machine is pre-wired to accept Product Link systems to be installed in the field. Product Link is also available as a factory installed attachment.

Machine Security. An optional Machine Security System is available from the factory. This system controls who can operate the machine when, and utilizes specific keys to prevent unauthorized machine use.

Ride Control. New for the D Series, the ride control system improves operator comfort and allows the machine to travel faster over rough terrain with improved ride quality for the operator. The ride control system features accumulators

acting as shock absorbers to dampen the front part motion. Ride control can be activated through a button located on the soft switch panel in the cab.



Engine

Cat C6.6 with ACERT Technology	
Ratings	1800 rpm
Gross power	124 kW/169 hp
Net power	
ISO 9249	118 kW/160 hp
80/1269/EEC	118 kW/160 hp
Bore	105 mm
Stroke	127 mm
Displacement	6.6 liters
Cylinders	6
Maximum torque at 1400 rpm	785 Nm

- All engine horsepower (hp) are metric including front page.
- EU Stage IIIA compliant.
- Full engine net power up to 3000 m altitude.

Transmission

	km/h
Forward/reverse	
1st gear	8
2nd gear	37
Creeper speed	
1st gear	3
2nd gear	13
Drawbar pull	97 kN
Maximum Gradeability	63%

Service Refill Capacities

	Liter
Fuel tank	310
Cooling	32
Engine crankcase	15
Rear axle housing (differential)	14
Front steering axle (differential)	10.5
Final drive	2.5
Powershift transmission	2.5

Hydraulic System

Tank capacity	135 liters
System	220 liters
Maximum pressure	
Implement circuit	
normal	350 bar
heavy lift	375 bar
Travel circuit	350 bar
Auxiliary circuit	
high pressure	350 bar
medium pressure	185 bar
Swing mechanism	310 bar
Maximum flow	
Implement/travel circuit	250 l/min
Auxiliary circuit	
high pressure	250 l/min
medium pressure	50 l/min
Swing mechanism	80 l/min

Swing Mechanism

Swing speed	10.5 rpm
Swing torque	40 kNm

Tires

- Standard
- 10.00-20 (dual pneumatic)
- Optional
- 11.00-20 (dual pneumatic)
 - 18 R 19.5 XF (single pneumatic)
 - 600/40-22.5 (single pneumatic)
 - 10.00-20 (dual solid rubber)

Weights

VA boom*	kg
rear dozer only	17 200
rear dozer, front outriggers	18 250
front and rear outriggers	18 500
One-piece boom*	
rear dozer only	16 700
rear dozer, front outriggers	17 750
front and rear outriggers	18 000
Offset boom*	
rear dozer only	17 650
rear dozer, front outriggers	18 700
front and rear outriggers	18 950

Cab

FOGS meets ISO 10262.

Sound Levels

Operator Sound

The operator sound level measured according to the procedures specified in ISO 6394:1998 is 72 dB(A), for cab offered by Caterpillar, when properly installed and maintained and tested with the doors and windows closed.

Exterior Sound

The labeled spectator sound power level measured according to the test procedures and conditions specified in 2000/14/EC is 103 dB(A).

Undercarriage


	mm
Ground clearance	370
Maximum steering angle	35°
Oscillation axle angle	± 9°
Minimum turning radius	
Standard axle	
outside of tire	6400
end of VA boom	7000
end of one-piece boom	8300
Wide axle	
outside of tire	6500
end of VA boom	7100
end of one-piece boom	8500

Sticks	kg
short (2100 mm)	470
medium (2400 mm)	514
long (2600 mm)	530
industrial (3100 mm)	450
Dozer blade	740
Outriggers	1030
Counterweight	
standard	3700
optional	4100

* Machine weight with medium stick, 4100 kg counterweight, full fuel tank and operator, without work tool.

Dimensions

All dimensions are approximate.

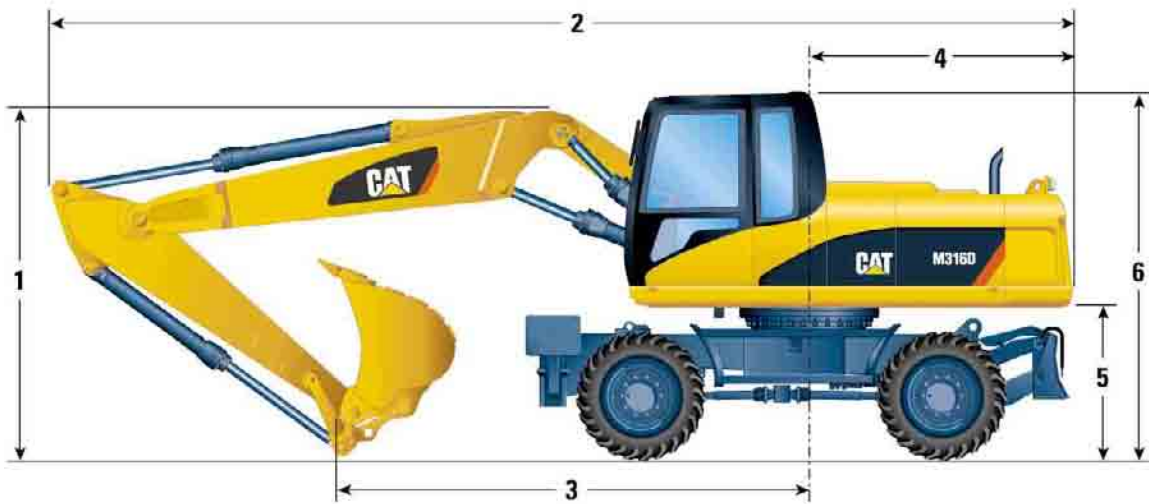

	mm	VA Boom				One-piece Boom				Offset Boom	
		2100	2400	2600	*3100	2100	2400	2600	*3100	2100	2400
Stick length	mm	2100	2400	2600	*3100	2100	2400	2600	*3100	2100	2400
1 Shipping height	mm	3170	3170	3170	3330	3170	3170	3170	3330	3170	3170
2 Shipping length	mm	8550	8550	8540	8510	8390	8400	8400	8405	8550	8540
3 Support point	mm	3910	3650	3550	3630	3560	3270	3150	3230	4020	3780
4 Tail swing radius	mm		2280			2280			2280		
5 Counterweight clearance	mm		1280			1280			1280		
6 Cab height	mm		3170			3170			3170		
with 1200 mm fixed cab riser	mm		4370			4370			4370		
Overall machine width	mm		2550			2550			2550		
Wide gauge axle	mm		2750			2750			2750		


* Industrial stick




Undercarriage with dozer only




Undercarriage with 2 sets of outriggers

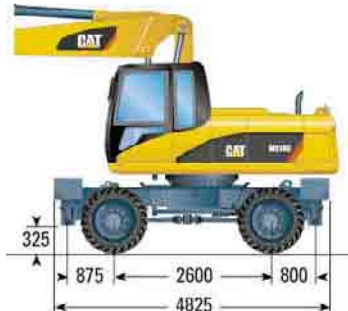

Undercarriage with 1 set of outriggers and dozer

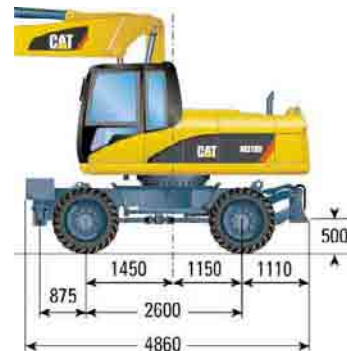

Working Ranges

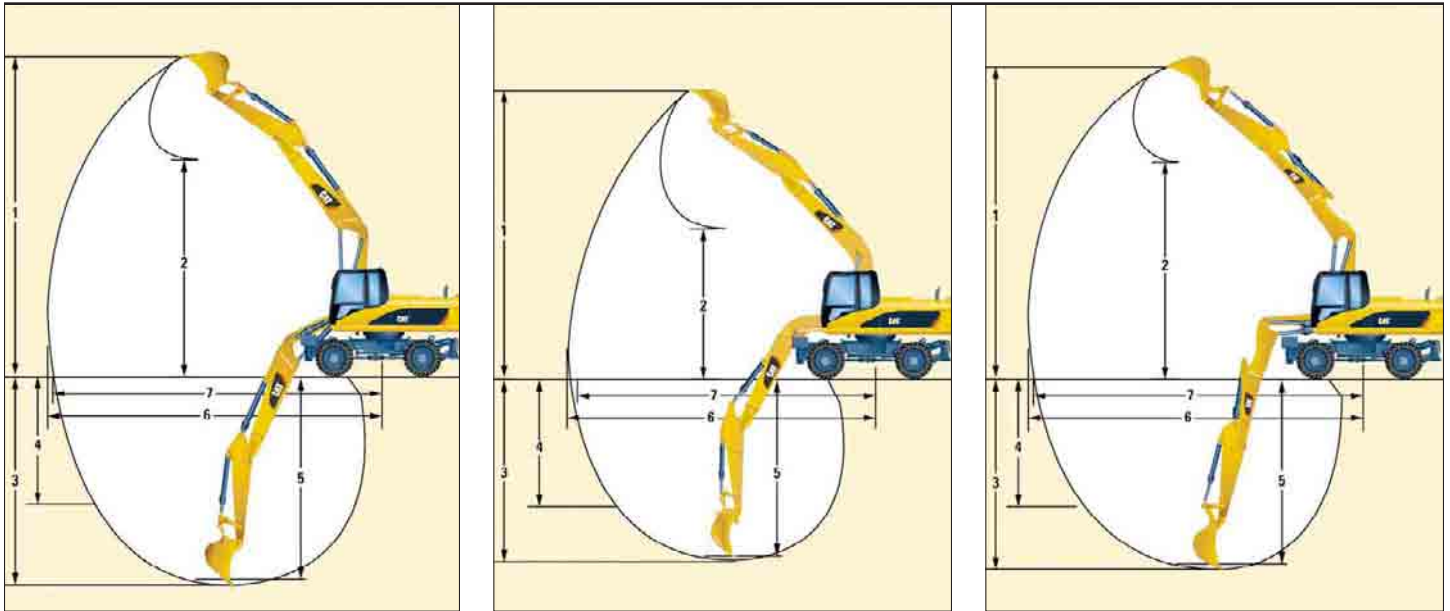

		VA Boom				One-piece Boom				Offset Boom	
		2100	2400	2600	*3100	2100	2400	2600	*3100	2100	2400
Stick length	mm										
1 Digging height	mm	10060	10250	10400	8970	9000	9090	9210	7720	9960	10150
2 Dump height	mm	6970	7160	7320	3980	6020	6130	6250	3200	7150	7340
3 Digging depth	mm	5570	5870	6070	5030	5370	5670	5870	4820	5450	5750
4 Vertical wall digging depth	mm	3700	3900	4070	–	3490	3630	3800	–	4100	4320
5 Depth 2.5 m straight clean-up	mm	5350	5670	5880	–	5150	5470	5680	–	5200	5520
6 Reach	mm	9100	9360	9560	8370	8900	9160	9350	8130	8970	9240
7 Reach at ground level	mm	8910	9190	9380	8170	8710	8970	9170	7920	8780	9060
Bucket forces (ISO 6015)	kN	101	101	101	–	101	101	101	–	101	101
Stick forces (ISO 6015)	kN	81	74	71	–	81	74	71	–	81	74

Values 1-7 are calculated with bucket and quick coupler with a tip radius of 1552 mm.
Breakout force values are calculated with heavy lift on (no quick coupler) and a tip radius of 1405 mm.

* Industrial stick has no bucket linkage.
All dimensions refer to sticknose.

Bucket Specifications

Contact your Caterpillar dealer for special bucket requirements.

Pin-on Buckets					Variable Adjustable Boom 5200 mm								One-piece Boom 5050 mm																
Stick length					2100 mm				2400 mm				2600 mm				2100 mm				2400 mm				2600 mm				
	Width	Weight*	Capacity (ISO)	Adapters	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	Free on wheels	Dozer lowered	1 set of stabilizer lowered	Fully stabilized	
																													mm
Excavation	600	459	0.38	3																									
	750	495	0.52	3																									
	900	557	0.65	4																									
	1000	591	0.75	4																									
	1100	622	0.84	4																									
	1200	668	0.94	5																									
	1300	699	1.03	5																									
	1400	731	1.13	5																									
Extreme Excavation	1200	702	0.94	5																									
	1300	735	1.03	5																									
Excavation (leveling)	600	485	0.41	3																									
	750	529	0.56	3																									
	800	547	0.61	4																									
	900	596	0.70	4																									
	1000	636	0.82	4																									
	1100	672	0.92	4																									
	1200	725	1.04	5																									
	1300	762	1.14	5																									
1400	798	1.26	5																										
Extreme Excavation (leveling)	1200	757	1.04	5																									
	1800	545	0.90																										
Ditch Cleaning	2000	590	1.00																										
	1800	875	0.75																										
Tiltable Ditch Cleaning	2000	910	0.84																										

CW Quick Coupler Buckets

Excavation	600	468	0.38	3																									
	750	504	0.52	3																									
	900	534	0.65	4																									
	1000	568	0.75	4																									
	1100	600	0.84	4																									
	1200	645	0.94	5																									
	1300	676	1.03	5																									
	1400	708	1.13	5																									
Extreme Excavation	1200	679	0.94	5																									
	1300	712	1.03	5																									
Excavation (leveling)	600	498	0.41	3																									
	750	547	0.56	3																									
	800	526	0.61	4																									
	900	575	0.70	4																									
	1000	614	0.82	4																									
	1100	651	0.92	4																									
	1200	704	1.04	5																									
	1300	741	1.14	5																									
1400	777	1.26	5																										
Extreme Excavation (leveling)	600	523	0.41	3																									
	800	555	0.61	4																									
	1000	644	0.82	4																									
Ditch Cleaning	1200	736	1.04	5																									
	1800	510	0.90																										
Tiltable Ditch Cleaning	2000	555	1.00																										
	1800	835	0.75																										
Ditch Cleaning	2000	870	0.84																										

* Bucket weight includes Ground Engaging Tools

Maximum material density 1800 kg/m³
 Maximum material density 1500 kg/m³
 Maximum material density 1200 kg/m³
 Not recommended

Work Tools Matching Guide

When choosing between various work tool models that can be installed onto the same machine configuration, consider work tool application, productivity requirements, and durability. Refer to work tool specifications for application recommendations and productivity information.

Without Quick Coupler		Variable Adjustable Boom 5200 mm												One-piece Boom 5050 mm												Offset Boom 5200 mm					
		(1)				(2)				(3)				(1)				(2)				(3)				(1)		(2)		(3)	
		Stick length (mm)																													
		2100	2400	2600	3100	2100	2400	2600	3100	2100	2400	2600	3100	2100	2400	2600	3100	2100	2400	2600	3100	2100	2400	2100	2400	2100	2400				
Hammers	H100, H100 S																														
	H115 S, H120C S																														
Multiprocessors	MP15	CC, CR																													
	MP15	PP																													
	MP15	PS																													
	MP15	S																													
Mechanical Pulverizer	P115																														
Hydraulic Shears (* boom mounted)	S115																														
	S320																														
	S320*																														
	S325*																														
Multi-Grapples	G310B	D, R																													
	G315B	D																													
		R																													
Mechanical Grapple	G112																														
Compactor	CVP75																														
Orange Peel Grapples	GSH15B 5 tines	400																													
		500																													
		600																													
		800																													
	GSH15B 4 tines	400																													
		500																													
		600																													
	800																														

With Quick Coupler (CW-20, CW-20S)

(1) Dozer lowered
(2) 2 sets of stabilizer lowered
(3) Dozer and stabilizer lowered

Hammers	H100, H100 S																											
	H115 S, H120C S																											
Multiprocessors	MP15	CC, CR, PS																										
	MP15	S																										
Multi-Grapples	G310B	D, R																										
	G315B	D, R																										
Mechanical Grapple	G112																											
Compactor	CVP75																											

360° Working Range

Over the front only


























Maximum material density 3000 kg/m³

Maximum material density 1800 kg/m³

























Maximum material density 1200 kg/m³

Lift Capacities – Variable Adjustable Boom (5200 mm)

All values are in kg, without bucket, with counterweight (4100 kg) and CW quick coupler (204 kg), heavy lift on.

Short Stick 2100 mm		Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																			
6.0 m		Rear dozer up				*5500		4600	4600		2800								
		Rear dozer down					*5500	5200		*5100	3200								
		Rear stab down						*5500		*5100	3900								
		2 sets stab down						*5500		*5100									
		Dozer and stab down						*5500		*5100	4700								
4.5 m		Rear dozer up	*6800		*6800	*6600		4500	4600		2900							1800	
		Rear dozer down		*6800	*6800		*6600	5100		*5400	3300							2100	
		Rear stab down		*6800	*6800		*6600	6100		*5400	4000							*2600	
		2 sets stab down	*6800		*6800	*6600		*6600		*5400								*2600	
		Dozer and stab down	*6800		*6800	*6600		*6600		*5400	4800							*2600	
3.0 m		Rear dozer up	*8700		8000	7000		4400	4600		2900	3100		1800				*2600	
		Rear dozer down		*8700	*8700		*7800	5000		*5800	3300			*4500	2100			*2600	
		Rear stab down		*8700	*8700		*7800	6000		*5800	3900			4200	2600			*2600	
		2 sets stab down	*8700		*8700	*7800		*7800		*5800					3800			*2600	
		Dozer and stab down	*8700		*8700	*7800		*7800		*5800	4700				3200			*2600	
1.5 m		Rear dozer up	*10500		7700	6900		4300	4600		2800	3100		1800				*2700	
		Rear dozer down		*10500	9000		*8600	5000		*6200	3200			4800	2100			*2700	
		Rear stab down		*10500	*10500		*8600	5900		6000	3900			4200	2600			*2700	
		2 sets stab down	*10500		*10500	*8600		8300		*6200					3700			*2700	
		Dozer and stab down	*10500		*10500	*8600		7100		*6200	4700				3200			*2700	
0 m		Rear dozer up	*12700		7300	7000		4200	4400		2700	3000		1700				2800	
		Rear dozer down		*12700	8700		*8700	4800		*6300	3100			*4200	2000			*2900	
		Rear stab down		*12700	11100		*8700	5900		6100	3700			4100	2500			*2900	
		2 sets stab down	*12700		*12700	*8700		8300		*6300					3700			*2900	
		Dozer and stab down	*12700		*12700	*8700		7200		*6300	4600				3100			*2900	
-1.5 m		Rear dozer up	13800		7300	6900		4000	4300		2500							3100	
		Rear dozer down		*14100	8600		*8800	4700		*6300	2900							*3200	
		Rear stab down		*14100	11100		*8800	5700		6000	3600							*3200	
		2 sets stab down	*14100		*14100	*8800		8600		*6300					5200			*3200	
		Dozer and stab down	*14100		*14100	*8800		7100		*6300	4400							*3200	
-3.0 m		Rear dozer up	14000		7400	6700		3800											
		Rear dozer down		*14300	8700		*8100	4500											
		Rear stab down		*14300	11200		*8100	5500											
		2 sets stab down	*14300		*14300	*8100		8100											
		Dozer and stab down	*14300		*14300	*8100		6900											

Medium Stick 2400 mm

Medium Stick 2400 mm		Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																			
6.0 m		Rear dozer up				*4800		4600	4600		2900								
		Rear dozer down					*4800	*4800		*4700	3300								
		Rear stab down						*4800		*4700	4000								
		2 sets stab down						*4800		*4700									
		Dozer and stab down						*4800		*4700	4700								
4.5 m		Rear dozer up	*5100		*5100	*5600		4500	4600		2900	*3000		1900				*2300	
		Rear dozer down		*5100	*5100		*5600	5100		*5300	3300			*3000	2100			*2300	
		Rear stab down		*5100	*5100		*5600	6100		*5300	4000			*3000	2600			*2300	
		2 sets stab down	*5100		*5100	*5600		*5600		*5300					*3000			*2300	
		Dozer and stab down	*5100		*5100	*5600		*5600		*5300	4700				3000			*2300	
3.0 m		Rear dozer up	*9400		8000	7000		4400	4600		2900	3100		1900				*2300	
		Rear dozer down		*9400	9100		*7500	5000		*5600	3300			*4500	2100			*2300	
		Rear stab down		*9400	*9400		*7500	6000		*5600	3900			4300	2600			*2300	
		2 sets stab down	*9400		*9400	*7500		*7500		*5600					3800			*2300	
		Dozer and stab down	*9400		*9400	*7500		*7500		*5600	4700				3200			*2300	
1.5 m		Rear dozer up	*10700		7800	6900		4300	4600		2900	3100		1800				*2400	
		Rear dozer down		*10700	8900		*8500	5000		*6200	3300			*4800	2100			*2400	
		Rear stab down		*10700	*10700		*8500	5900		6000	3900			4200	2600			*2400	
		2 sets stab down	*10700		*10700	*8500		8300		*6200					3800			*2400	
		Dozer and stab down	*10700		*10700	*8500		7100		*6200	4700				3200			*2400	
0 m		Rear dozer up	*12500		7600	6900		4200	4400		2700	3000		1800				*2500	
		Rear dozer down		*12500	8900		*8600	4800		*6200	3100			*4700	2000			*2500	
		Rear stab down		*12500	11200		*8600	5900		6000	3800			4100	2500			*2500	
		2 sets stab down	*12500		*12500	*8600		8300		*6200					3700			*2500	
		Dozer and stab down	*12500		*12500	*8600		7100		*6200	4600				3100			*2500	
-1.5 m		Rear dozer up	13600		7300	6													

Long Stick
2600 mm

	Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m			m		
6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*4300	*4300	*4300	*4400	*4400	*4400	2900	3300	4000	*4400	*4400	
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*5000	*5000	*5000	4500	4600	*5000	2900	3300	4000	*3600	*3600	3200
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*9300	*9300	8000	7000	*7400	*7400	4400	4600	*5600	2900	3300	3900	3200	*4600	1900
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*10600	*10600	7800	6900	*8400	*8400	4300	4600	*6100	2900	3300	3900	3100	*4800	1800
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*12200	*12200	7600	6900	*8600	*8600	4200	4500	*6200	2700	3100	3800	3000	*4800	1800
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13500	*14000	7300	6900	*8700	*8700	4000	4300	*6300	2500	2900	3600	3000	*3300	1700
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13900	*14400	7200	6700	*8900	*8900	3900	4200	*5200	2400	2800	3500			
-4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*10100	*10100	7200												

- Load point height
- Load over front
- Load over rear
- Load over side
- Load at maximum reach
- Load point height

























Industrial Stick
3100 mm

	Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m			m		
6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down							*4600	*4600	*4600	3300	3700	4400	*4600	*4600	
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*5100	*5100	*5100	4900	5000	*5200	3300	3700	4400	3600	*4200	2300
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*8800	*8800	8400	7400	*7500	*7500	4700	4900	*5900	3300	3700	4300	3600	*4900	2300
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*11600	*11600	8200	7300	*8700	*8700	4700	4900	*6400	3200	3700	4300	3500	*5200	2200
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*12800	*12800	8100	7300	*9100	*9100	4600	4900	*6700	3100	3500	4200	3400	5200	2200
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	14000	*14400	7800	7300	*9200	*9200	4400	4700	*6700	2900	3300	4000	3300	*4800	2100
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	14200	*14700	7600	7100	*9400	*9400	4300	4600	*6200	2800	3200	3900			
-4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*12000	*12000	7500	*6000	*6000	*6000	4100	4700							

























* Limited by hydraulic rather than tipping load. Lift capacity ratings are based on ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Oscillating axle must be locked.

Lift Capacities – One-piece Boom (5050 mm)
















All values are in kg, without bucket, with counterweight (4100 kg) and CW quick coupler (204 kg), heavy lift on.


Short Stick 2100 mm		Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																			
6.0 m		Rear dozer up							*4400		2800								7.46
		Rear dozer down									*4400	3200							
		Rear stab down									*4400	3900							
		2 sets stab down									*4400	*4400							
		Dozer and stab down									*4400	*4400							
4.5 m		Rear dozer up				*6300		4400	4500		2800				*2600		2000	7.91	
		Rear dozer down					*6300	5000			3200					*2600	2300		
		Rear stab down						6100			3800						*2600		
		2 sets stab down				*6300		*6300	*5400			*5400				*2600	*2600		
		Dozer and stab down				*6300		*6300	*5400			*5400				*2600	*2600		
3.0 m		Rear dozer up				6900		4100	4400		2700				*2600		1800	7.91	
		Rear dozer down					*7600	4700			3100					*2600	2000		
		Rear stab down					*7600	5700			3700					*2600	2400		
		2 sets stab down				*7600		*7600	*5800			5400				*2600	*2600		
		Dozer and stab down				*7600		*7600	*5800			4500				*2600	*2600		
1.5 m		Rear dozer up				6600		3800	4300		2500	3100	1800		*2700		1700	8.01	
		Rear dozer down					*8600	4400			2900		*3900	2100		*2700	1900		
		Rear stab down					*8600	5400			3600		*3900	2600			2400		
		2 sets stab down				*8600		*8600	*6300			5200	*3900	3700		*2700	*2700		
		Dozer and stab down				*8600		*8600	*6300			4400	*3900	3200		*2700	*2700		
0 m		Rear dozer up				6400		3700	4200		2500				*2900		1700	7.78	
		Rear dozer down					*8800	4200			2800					*2900	2000		
		Rear stab down					*8800	5300			3500						2400		
		2 sets stab down				*8800		*8800	*6400			5100				*2900	*2900		
		Dozer and stab down				*8800		*8800	*6400			4300				*2900	*2900		
-1.5 m		Rear dozer up	*8000			6300		3600	4100		2400				3200		1900	7.20	
		Rear dozer down		*8000			*8000	4200			2800					*3400	2200		
		Rear stab down		*8000			*8000	5200			3500					*3400	2700		
		2 sets stab down	*8000			*8000		*8000	*5800			5100				*3400	*3400		
		Dozer and stab down	*8000			*8000		*8000	*5800			4300				*3400	3300		
-3.0 m		Rear dozer up	*8300			6200		3700											
		Rear dozer down		*8300			*6200	4300											
		Rear stab down		*8300			*6200	5300											
		2 sets stab down	*8300			*6200		*6200											
		Dozer and stab down	*8300			*6200		*6200											

Medium Stick 2400 mm










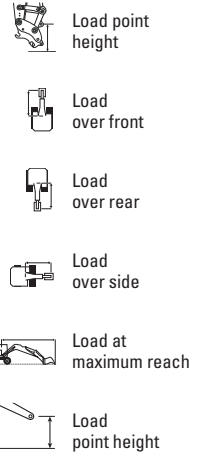




Medium Stick 2400 mm		Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																			
6.0 m		Rear dozer up								*4400		2800						7.74	
		Rear dozer down									*4400	3200							
		Rear stab down										*4400	3900						
		2 sets stab down										*4400	*4400						
		Dozer and stab down										*4400	*4400						
4.5 m		Rear dozer up								4500		2800			*2300		1900	8.17	
		Rear dozer down									*5100	3200				*2300	2100		
		Rear stab down										*5100	3900				*2300		
		2 sets stab down										*5100	*5100				*2300		
		Dozer and stab down										*5100	*5100				*2300		
3.0 m		Rear dozer up				6900		4100	4400		2700	3100	1900		*2300		1700	8.27	
		Rear dozer down					*7300	4700			3100		*4000	2100		*2300	1900		
		Rear stab down					*7300	5800			3700		*4000	2600		*2300	*2300		
		2 sets stab down				*7300		*7300	*5700			5400	*4000	3800		*2300	*2300		
		Dozer and stab down				*7300		*7300	*5700			4600	*4000	3200		*2300	*2300		
1.5 m		Rear dozer up				6600		3800	4300		2500	3000	1800		*2400		1600	8.05	
		Rear dozer down					*8400	4400			2900		*4800	2100		*2400	1800		
		Rear stab down					*8400	5500			3600		4200	2600		*2400	2200		
		2 sets stab down				*8400		*8400	*6200			5200	*4800	3700		*2400	*2400		
		Dozer and stab down				*8400		*8400	*6200			4400	*4800	3200		*2400	*2400		
0 m		Rear dozer up	*4000			6400		3600	4100		2400	3000	1800		*2600		1600	7.49	
		Rear dozer down		*4000			*8800	4200			2800		*4100	2100		*2600	1900		
		Rear stab down		*4000			*8800	5300			3500		*4100	2500		*2600	2300		
		2 sets stab down	*4000			*8800		*8800	*6300			5100	*4100	3700		*2600	*2600		
		Dozer and stab down	*4000			*8800		*8800	*6300			4300	*4100	3100		*2600	*2600		
-1.5 m		Rear dozer up	*7800			6300		3600	4100		2400				*3000		1800	7.49	
		Rear dozer down		*7800			*8200	4200			2800					*3000	2100		
		Rear stab down		*7800			*8200	5200			3400					*3000	2500		
		2 sets stab down	*7800			*8200		*8200	*6000			5100				*3000	*3000		
		Dozer and stab down	*7800			*8200		*8200	*6000			4300				*3000	*3000		
-3.0 m		Rear dozer up	*9200			6700		3600	4200		2500								
		Rear dozer down		*9200			*6700	4200			2800								
		Rear stab down		*9200			*6700	5300			3500								
		2 sets stab down	*9200			*6700		*6700	*4400			5100							
		Dozer and stab down	*9200			*6700		*6700	*4400			4300							

Long Stick
2600 mm

	Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																		
6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down							*4200			2900							
									*4200		3300							
									*4200		3900							
									*4200									
									*4200									
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down							4600			2800	*2500		1900	*2100		1800	7.95
									*5000		3200	*2500		2200	*2100		2000	
									*5000		3900	*2500		2500	*2100		2100	
									*5000			*2500		*2500	*2100		*2100	
									*5000		4700	*2500		*2500	*2100		*2100	
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				7000			4400			2700	3100		1900	*2100		1600	8.36
						*7100		4800			3100		*4200	2200	*2100		1800	
						*7100		5800			3700		*4200	2600	*2100		2100	
					*7100			*7100			5400	*4200		3800	*2100		*2100	
								*5500			4600	*4200		3200	*2100		*2100	
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				6600			4300			2600	3100		1800	*2200		1500	8.46
						*8300		4400			2900		4800	2100	*2200		1800	
						*8300		5500			3600	4200		2600	*2200		2200	
					*8300			*8300			5200	*4900		3700	*2200		*2200	
								*6100			4400	*4900		3200	*2200		*2200	
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*4200		*4200	6400			4200			2400	3000		1800	*2400		1600	8.25
			*4200	*4200		*8800		4200			2800		4700	2000	*2400		1800	
				*4200		*8800		5300			3500		4100	2500	*2400		2200	
		*4200		*4200	*8800			8000	*6300		5100	*4800		3700	*2400		*2400	
		*4200		*4200	*8800			6600	*6300		4300	*4800		3100	*2400		*2400	
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*7500		6500	6300			4100			2400				*2800		1700	7.7
			*7500	*7500		*8400		4200			2800				*2800		2000	
			*7500	*7500		*8400		5200			3400				*2800		2400	
		*7500		*7500	*8400			7900	*6000		5100				*2800		*2800	
		*7500		*7500	*8400			6500	*6000		4200				*2800		*2800	
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*9700		6700	6400			4100			2400							
			*9700	7900		*6900		4200			2800							
				*9700		*6900		5200	*4800		3500							
		*9700		*9700	*6900			5200	*4800		3500							
		*9700		*9700	*6900			6600	*4800		4300							




















Industrial Stick
3100 mm

	Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m	
																		
6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down									*4500			3300					
										*4500			3700					
										*4500			4300					
										*4500								
										*4500								
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down									5000			3200	*3600		2300	*3200	7.64
										*5200			3600	*3600		2600	*3200	
										*5200			4300	*3600		3100	*3200	
										*5200				*3600		*3600	*3200	
										*5200			5100	*3600		*3600	*3200	
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*7200			4800			3100	3500		2300	*3200		2100	8.03
						*7200		5200			3500		*4800	2500	*3200		2300	
						*7200		6300			4100		4600	3000	*3200		2700	
					*7200			*7200			*5800			4200	*3200		*3200	
								*5800			5000	*4800		3600	*3200		*3200	
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				7100			4700			3000	3400		2200	3100		2000	8.12
						*8600		4900			3300		5200	2500	*3400		2200	
						*8600		6000			4000		4600	3000	*3400		2600	
					*8600			*8600			5600	*5300		4100	*3400		*3400	
								*6400			4800	*5300		3500	*3400		3200	
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*5800		*5800	6800			4600			2900	3400		2200	3100		2000	7.92
			*5800	*5800		*9300		4700			3200		5100	2400	*3800		2300	
				*5800		*9300		5700			3900		4500	2900	*3800		2700	
		*5800		*5800	*9300			8500	*6800		5500	*5300		4100	*3800		*3800	
		*5800		*5800	*9300			7100	*6800		4700	*5300		3500	*3800		3200	
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*8600		7100	6700			4500			2800				3400		2200	7.40
			*8600	8300		*9000		4600			3200				*4600		2400	
			*8600	*8600		*9000		5600			3800				*4600		2900	
		*8600		*8600	*9000			8400	*6600		5500				*4600		4100	
		*8600		*8600	*9000			7000	*6600		4600				*4600		3500	
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*11000		7100	6800			4500			2800							
			*11000	8400		*7800		4600			3200							
			*11000	10700		*7800		5600			3800							
		*11000		*11000	*7800			5600	*5600		5500							
		*11000		*11000	*7800			7000	*5600		4600							
-4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*7100		*7100	*5000			4100										
			*7100	*7100		*5000		4700										
			*7100	*7100		*5000		5000										
		*7100		*7100	*5000			5000										
		*7100		*7100	*5000			5000										


















* Limited by hydraulic rather than tipping load. Lift capacity ratings are based on ISO 10567, they do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. Oscillating axle must be locked.

Lift Capacities – Offset Boom (5200 mm)

All values are in kg, without bucket, with counterweight (4100 kg) and CW quick coupler (204 kg), heavy lift on.

Short Stick 2100 mm	 Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m					
																						
		6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*5500 *5500 *5500 *5500				4600 *5500 *5500 *5500	4500 *5100 *5100 *5100										
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*6900 *6900 *6900 *6900			6900 *6500 *6500 *6500				4500 5100 6100 *5300 *5300	4600 *5300 *5300 *5300							*2300 *2300 *2300 *2300			1700 2000 *2300 *2300	7.70	
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*7900 *7900 *7900 *7900			6900 *7600 *7600 *7600				4300 5000 5900 *7600 *7600	4500 *5700 *5700 *5700				2800 3200 3900 5300 4600	3000 *4400 4200 *4400			*2300 *2300 *2300 *2300			1500 1800 2200 *2300 *2300	8.12
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*10300 *10300 *10300 *10300			7600 8900 *10300 *8300 *8300				4300 4900 5800 8100 7000	4500 *6000 5900 *6000 *6000				2700 3100 3800 5300 4600	2900 *4700 4100 *4700			*2300 *2300 *2300 *2300			1400 1700 2100 *2300 *2300	8.22
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*12600 *12600 *12600 *12600			7100 8400 10900 *8400 *8400				4100 4700 5800 8100 7100	4300 *6100 6000 *6100 *6100				2500 2900 3600 5300 4500	2900 *4000 *4000 *4000			*2500 *2500 *2500 *2500			1500 1700 2200 *2500 *2500	8.00
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13500 *13700 *13700 *13700 *13700			7000 8400 10900 *8600 *8600				3900 4500 5600 8400 7000	4100 *6000 5900 *6000 *6000				2400 2700 3400 5100 4300			*2800 *2800 *2800 *2800			1600 1900 2400 *2800 *2800	7.44	
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13800 *14000 *14000 *14000 *14000			7100 8500 10900 *7900 *7900				3600 4300 5300 *7900 6700													

Medium Stick 2400 mm

Medium Stick 2400 mm	 Undercarriage configuration	3.0 m			4.5 m			6.0 m			7.5 m						m					
																						
		6.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down				*4800 *4800 *4800 *4800				4600 *4800 *4800 *4800	4600 *4700 *4700 *4700										
4.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*5300 *5300 *5300 *5300			*5700 *5700 *5700 *5700				4500 5100 *5700 *5700	4600 *5100 *5100 *5100				*2800 *2800 *2800 *2800			*2000 *2000 *2000 *2000			1600 1900 *2000 *2000	7.99	
3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*8600 *8600 *8600 *8600			7900 *8600 *8600 *7300 *7300				4300 5000 5900 *7300 7100	4500 *5500 *5500 *5500				2900 3300 3900 5400 4600	3000 *4500 *4500 *4500			*2000 *2000 *2000 *2000			1400 1700 *2000 *2000	8.40
1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*10400 *10400 *10400 *10400			7600 8800 *10400 *8200 *8200				4300 4900 5800 8000 6900	4500 *5900 *5900 *5900				2800 3200 3900 5300 4600	3000 *4700 4100 *4700			*2100 *2100 *2100 *2100			1300 1600 2000 *2100 *2100	8.49
0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	*12200 *12200 *12200 *12200			7400 8800 10900 *8300 *8300				4100 4700 5800 8100 7000	4400 *6000 5900 *6000 *6000				2600 3000 3700 5300 4500	2900 *4500 4000 *4500			*2200 *2200 *2200 *2200			1400 1600 2000 *2200 *2200	8.28
-1.5 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13300 *13600 *13600 *13600 *13600			7000 8400 10900 *8500 *8500				3900 4500 5600 8300 7000	4200 *6100 5900 *6100 *6100				2400 2800 3500 5100 4300			*2500 *2500 *2500 *2500			1500 1800 2300 *2500 *2500	7.74	
-3.0 m	Rear dozer up Rear dozer down Rear stab down 2 sets stab down Dozer and stab down	13700 *14100 *14100 *14100 *14100			7000 8400 10800 *8400 *8400				3700 4300 5400 8200 6700	4000 *4300 *4300 *4300				2300 2700 3300 *4300 4200								

Standard Equipment

Standard equipment may vary. Consult your Caterpillar dealer for specifics.

Electrical

Alternator, 75 A
Lights
 Boom working light
 Cab interior light
 Roading lights (two front, two rear)
Main shut-off switch
Maintenance free batteries
Signal/warning horn

Engine

Automatic engine speed control
Automatic starting aid
Cat C6.6 with ACERT Technology
 EU Stage IIIA compliant
Fuel/water separator with level indicator

Hydraulics

Cat XT-6 ES hoses
Heavy lift mode
Load-sensing Plus hydraulic system
Manual work modes (economy, power)
Separate swing pump
Stick regeneration circuit

Operator Station

Adjustable armrests
Ash tray with cigarette lighter (24 volt)
Beverage cup/can holder
Bolt-on FOGS capability
Bottle holder
Coat hook
Floor mat, washable, with storage compartment
Fully adjustable suspension seat
Heater and defroster
Instrument panel and gauges
 Information and warning messages in local language
 Gauges for fuel level, engine coolant and hydraulic oil temperature
 Filters/fluids change interval, working hour
 Indicators for headlights, turning signal, low fuel, engine dial setting
 Clock with 10-day backup battery
Laminated front windshield
Left side console, tiltable, with lock out for all controls
Literature compartment behind seat
Literature holder in right console
Mobile phone holder
Parking brake

Parallel mounted top and bottom wiper and washer
Positive filtered ventilation, pressurized cab
Power supply, 12V-7A
Rear window, emergency exit
Retractable seat belt
Skylight
Sliding door windows
Steering column, tiltable
Storage area suitable for a lunch box
Sunshade for windshield and skylight

Undercarriage

Bolt-on design for front attachments
Heavy-duty axles, advanced travel motor, adjustable braking force
Oscillating front axle with remote greasing
Pin-on design for rear attachments
Tires, 10.00-20 16 PR, dual
Tool box in undercarriage
Two-piece drive shaft
Two-speed transmission, manual and automatic gear shifting

Other Equipment

Automatic swing brake
Counterweight, 3700 kg
Mirrors, frame and cab
Product Link ready

Optional Equipment

Optional equipment may vary. Consult your Caterpillar dealer for specifics.

Auxiliary Controls and Lines

Auxiliary boom and stick lines
Anti-drift valves for bucket, stick, VA boom and tool control/multi-function circuits
Basic control circuits:
 Single action
 One-way, high pressure circuit, for hammering application
 Medium pressure
 Two-way, medium pressure circuit, for rotating or tilting of work tools
 Tool control/multi function
 One/two-way high pressure for hammer application or opening and closing of a work tool
 Programmable flow and pressure for up to 10 work tools - selection via monitor
 Second high pressure
 Additional two-way, high pressure circuit, for tools requiring a second high or medium pressure function
 Quick coupler control
 Biodegradable hydraulic oil (synthetic ester based)
 Generator with valve and priority function
 Lowering control devices for boom and stick
 SmartBoom

Front Linkage

Booms
 One-piece boom, 5050 mm
 VA boom (two piece), 5200 mm
 Offset boom, 5200 mm
Bucket linkage
Bucket linkage with diverter valve
Sticks
 2100, 2400, 2600 mm
 3100 mm industrial with drop nose

Electrical

Back-up alarm with three selectable modes
Heavy-duty maintenance free batteries
Roading lights, rear (LED modules)
Refueling pump
Rotating beacon on cab
Working lights, cab mounted (front and rear)

Operator Station

Adjustable hydraulic sensitivity
Air conditioner, heater and defroster with automatic climate control
Camera mounted on counterweight, displays through cab monitor
Falling objects guard
Fixed cab riser, 1200 mm
Joystick steering
Lid for storage compartment
Radio ready mounting (12 V or 24 V) at rear location including speakers and 12 V converter

Seat, adjustable high-back
 – mechanical suspension
 – air suspension (vertical)
 – deluxe with headrest, air suspension
Headrest
Travel speed lock
Vandalism guards
Visor for rain protection
Windshield
 One-piece high impact resistant
 50/50 split, openable; 70/30 split, openable

Undercarriage

Dozer blade, front or rear mounted
Outriggers, front and/or rear mounted
Second tool box for undercarriage
Spacer rings for tires
Wide axles

Other Equipment

Auto-lube system (implements and swing gear)
Cat Machine Security System
Cat Product Link
Counterweight, 4100 kg
Custom paint
Mirrors heated, frame and cab
Ride Control
Tires (see pg.13)
Tool box in upperframe, lockable
Waste Handling Package

M316D Wheel Excavator

For more complete information on Cat products, dealer services, and industry solutions, visit us on the web at www.cat.com

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment. See your Caterpillar dealer for available options.

© 2007 Caterpillar -- All rights reserved

CAT, CATERPILLAR, their respective logos, "Caterpillar Yellow" and the POWER EDGE trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

HEHH3568 (02/2007) hr

CATERPILLAR[®]